


**Manufacturer:** Quick Bauprodukte GmbH  
**Test requirements:** Test instruction fibre concrete "Norwegian Standard"  
**Material / Mixture-No.:** Quick fiber concrete M1  
**Concrete quality:** C45/55  
**Exposure class concrete:** acc. to Eurocode 2 (EC2) X0 / XC4 / XD 3 / XF4 / XA2

**Article / Article-No.:** Mounting-Bipo 70 without wire, with 1 trough / 220370  
**Concrete cover:** 70 mm  
**Production date:** 08.12.2022  
**Test period:** 23.01.-26.01.2023

#### Results dimension test

Part No.	H	Vippediagonal
1	72,0	78,0
2	71,0	78,0
3	72,0	80,0
<b>mean</b>	<b>71,7</b>	<b>78,7</b>

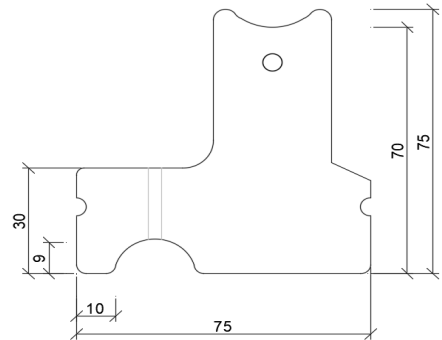

#### Results water absorption test

Part No.	Storage weight in g after 48 hours heat treatment curing at +105°C	Weight in g after 30 min. immersion	Water content in % after 30 min. (to be < 5 %)	Weight in g after 24 hours immersion	Water content in % after 24 hours (to be < 8,5 %)
1	234	240	2,7%	249	6,5%
2	236	240	3,4%	246	6,4%
3	243	250	2,4%	261	7,1%
<b>mean</b>			<b>2,8%</b>		<b>6,7%</b>

#### Results breaking load test

Part No.	breaking load F / kN (to be >6 kN)
1	7,7
2	8,7
3	8,2
<b>mean</b>	<b>8,2</b>

This certificate complies to the requirements of DIN / EN 10204:2005-01-3.1

The buyer is not released from any entry control.  
It is also irrelevant in case of incorrect use or handling.